Lewiston-Porter Central School District

Our Purpose, Your Pathway, Our Promise.

4061 Creek Road
Youngstown, NY 14174
716-754-8281

Public Hearing Notice

Lewiston-Porter Central School District
4061 Creek Road
Youngstown, NY 14174-9799

Notice of Public Hearing: For the authorization to expend funds from the District Repair Reserve Account to make necessary repairs to the JV & Varsity Baseball and Softball fields.

PUBLIC NOTICE is given to all persons in the Lewiston-Porter Central School District that a public hearing will be held on May 23, 2022, at 6:00 pm at the Community Resource Center, boardroom, to solicit comments on expending $73, 315.00 from the District's Repair Reserve Account to make necessary repairs to the JV & Varsity Baseball and Softball fields.

The proposed expense is to provide renovations to the existing JV and Varsity softball fields and the existing JV and Varsity baseball fields as routine and preventative maintenance repairs for the safety of the players, and to confirm ball fields are compliant with the National Federation of State High School Associations. Details of the renovations will be provided at the public hearing.

All persons interested are invited to attend this hearing and be heard.

May 18, 2022

TRAUTMAN ASSOCIATES
ARCHITECTS / ENGINEERS

37 Franklin Street, Suite 100
Buffalo, New York 14202

P 716 883 4400
F 716 883 4268

TrautmanAssociates.com

May 17, 2022
Lewiston-Porter Central School District
Renovate Ball Fields
TA 22043

Scope of Work:

Provide renovations to the existing JV and varsity softball fields and the existing JV and varsity baseball fields as routine and preventative maintenance, repairs for the safety of the players, and to confirm ball fields are compliant with the National Federation of State High School Associations (NFHS) as follows:

- JV Softball Field
    - Layout and edge entire field.
    - Renovate 1-2" of clay in-field
    - Build new pitching area
    - Build new home plate area
    - Install clay 1", laser grade and compact
    - Hand rake all edge and hand trim lips to new sod edge
    - Groom and drag to perfection
    - Material needed:
        - Sports clay: +35 tons
        - Mound clay:
            - Mound: 1 sack
            - Homeplate: 1 sack
        - Mound bricks
            - Mound: 1 pallet
            - Homeplate: 1 pallet
        - Homeplate, pitching rubber, set of bases/anchors
- Varsity Softball Field
    - Layout and edge entire field.
    - Renovate 1-2" of clay in-field
    - Build new pitching area
    - Build new home plate area
    - Install clay 1", laser grade and compact
    - Hand rake all edge and hand trim lips to new sod edge
    - Groom and drag to perfection
    - Material needed:
        - Sports clay: +35 tons
        - Mound clay:
            - Mound: 1 sack
            - Homeplate: 1 sack
        - Mound bricks
            - Mound: 1 pallet
            - Homeplate: 1 pallet
        - Homeplate, pitching rubber, set of bases/anchors
- JV Baseball Field
    - Layout and edge entire field.

- Strip out sod (25x25) entire mound area and regrade base
- Renovate 1-2" of clay in-field
- Build new mound area
- Build new home plate area
- Finish grade around new mound area
- Laser grade and compact
- Hand rake all edge and hand trim lips to new sod edge
- Groom and drag to perfection
- Material needed:
  - Mound clay:
    - Mound: 8 sacks
    - Homeplate: 2 sacks
  - Mound bricks
    - Mound: 1 pallet
    - Homeplate: 1 pallet
  - Bluegrass Sod: 300-400 sf
  - Homeplate, pitching rubber, set of bases/anchors

- Varsity Baseball Field
  - Layout and edge entire field.
  - Renovate 1-2" of clay in-field
  - Renovate mound area
  - Build new home plate area
  - Add 1" of clay, laser grade and compact
  - Trim and edge warning track
  - Add warning track clay as needed
  - Hand rake all edge and hand trim lips to new sod edge
  - Groom and drag to perfection
  - Material needed:
    - Sports clay: +35 tons
    - Warning track clay: 35 tons
    - Mound clay:
      - Mound: 1 sack
      - Homeplate: 2 sacks
    - Mound bricks
      - Mound: 1 pallet
      - Homeplate: 1 pallet
    - Homeplate, pitching rubber, set of bases/anchors

The estimated construction cost for the above work scope is $73,315.

Work to be constructed Fall 2022 after the fall sports season so fields are ready for next season.

Typical existing clay infield to grass outfield edge condition – Add clay and straighten edge.

Typical existing clay infield to grass baseline edge condition – Add clay and straighten edge, new bases.

Typical existing softball pitcher's mound – Add clay and new mount plate

Varsity pitcher's mound – To be reconstructed

Typical existing home plate area – Reconstruct, add clay and new home plate

Existing Varsity warning track – Add clay, raise low areas and straighten edge.

BVV:bvv
P:\Lewiston Porter CSD\22043 Renovate Ball Fields\Correspondence\Letters\22043 Scope of Work.doc

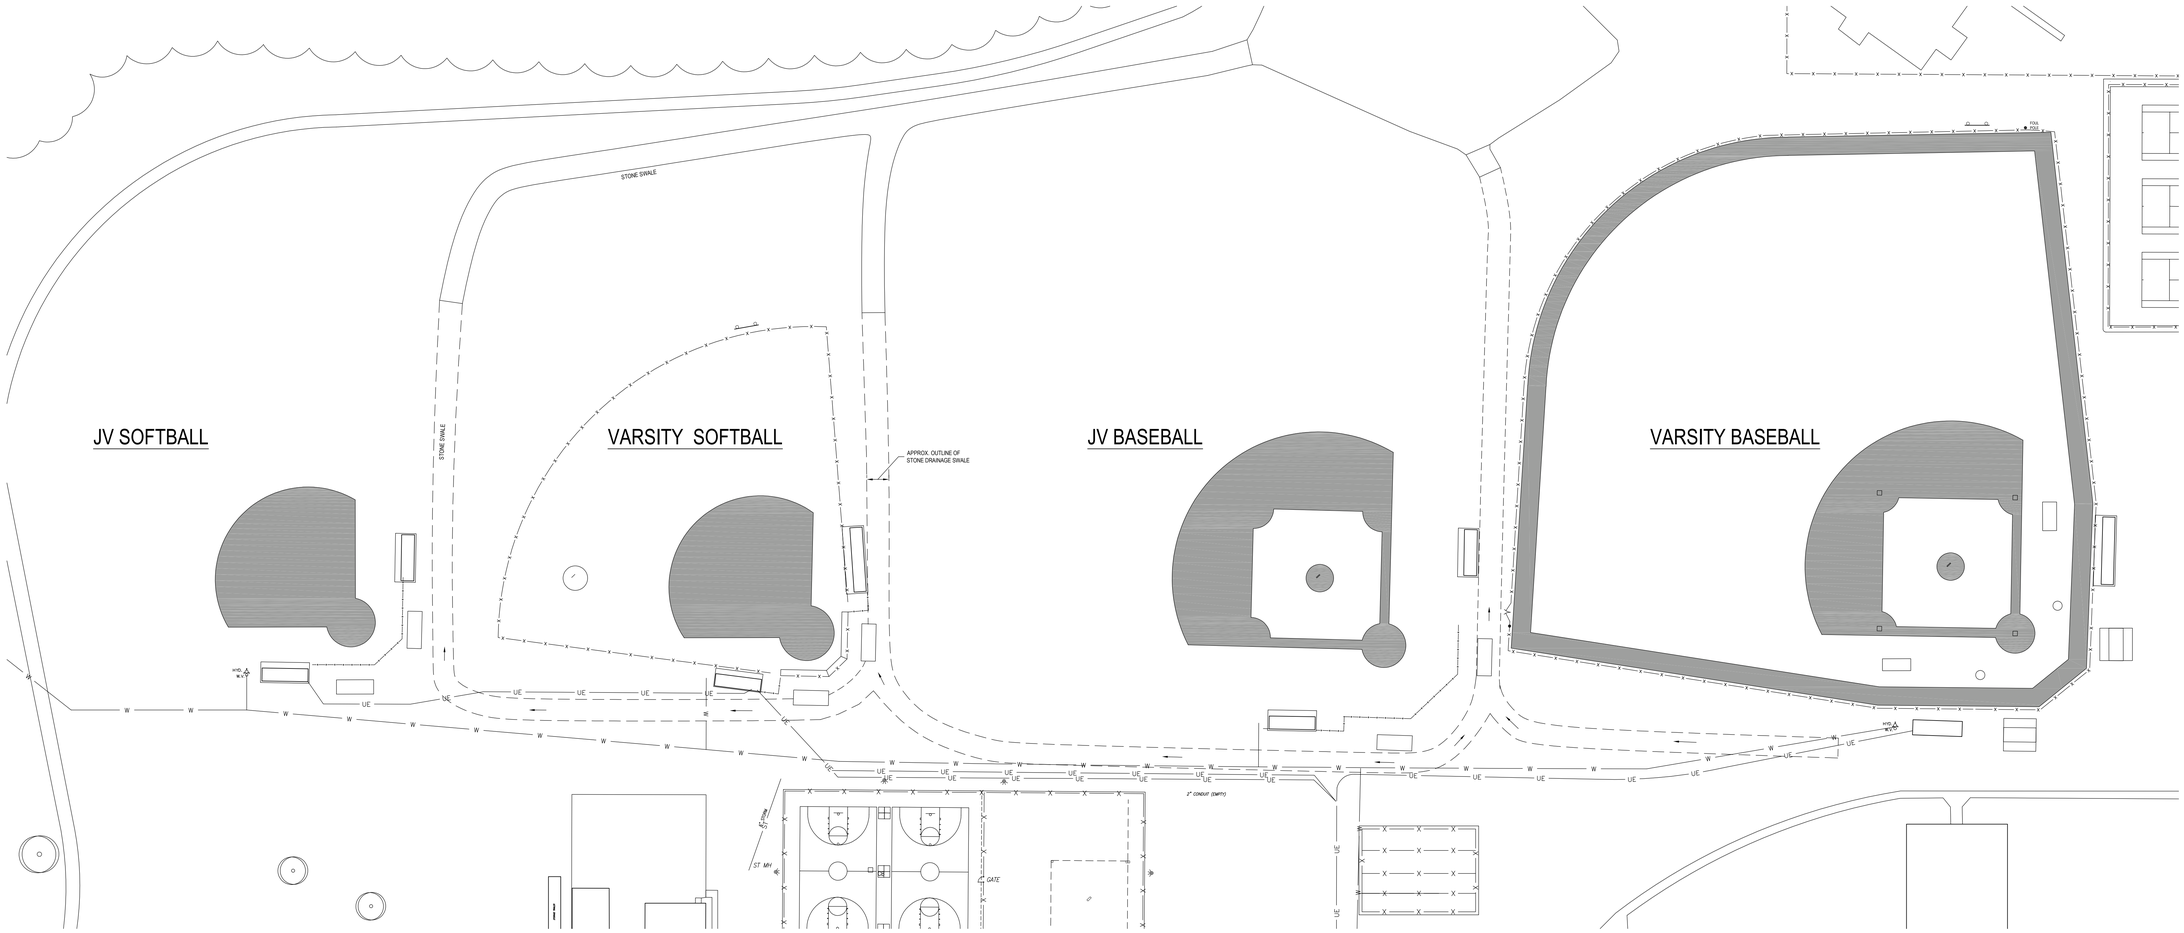

TOPOGRAPHY AS SHOWN HAS BEEN OBTAINED FROM PLANS BY OTHERS AND SITE VISITS APRIL 2022 AND NOT FROM RECENT INSTRUMENTATION SURVEY. ALL UTILITIES SHOWN ARE APPROXIMATE. CONTRACTOR TO FIELD VERIFY EXISTING CONDITIONS.

1 EXISTING SITE PLAN

1" = 40.0'

NOTE
- SHADED AREAS INDICATE CLAY AREAS

RENOVATIONS TO JV SOFTBALL FIELD
- LAYOUT AND EDGE ENTIRE FIELD
- RENOVATE 1-2" DEPTH
- BUILD NEW PITCHING AREA
- BUILD NEW HOMEPLATE AREA
- INSTALL CLAY 1" LASER GRADE AND COMPACT
- HAND RAKE ALL EDGE AND HAND TAMP LIPS TO EDGE.
- GROOM AND DRAG TO PERFECTION
- PROVIDE AND INSTALL HOMEPLATE, PITCHING RUBBER, SET OF BASES AND ANCHORS

RENOVATIONS TO VARSITY SOFTBALL FIELD
- LAYOUT AND EDGE ENTIRE FIELD
- RENOVATE 1-2" DEPTH
- BUILD NEW PITCHING AREA
- BUILD NEW HOMEPLATE AREA
- INSTALL CLAY 1" LASER GRADE AND COMPACT
- HAND RAKE ALL EDGE AND HAND TAMP LIPS TO EDGE.
- GROOM AND DRAG TO PERFECTION
- PROVIDE AND INSTALL HOMEPLATE, PITCHING RUBBER, SET OF BASES AND ANCHORS

RENOVATIONS TO JV BASEBALL FIELD
- LAYOUT AND EDGE ENTIRE FIELD
- STRIP OUT SOD (25' X 25') ENTIRE MOUND AREA AND REGRADE BASE
- RENOVATE 1-2" OF CLAY INFIELD
- BUILD NEW MOUND AREA
- BUILD NEW HOMEPLATE AREA
- FINISH GRADE AROUND NEW MOUND AND SOD
- LASER GRADE AND COMPACT
- HAND RAKE ALL EDGE AND HAND TAMP LIPS TPO NEW SOD EDGE.
- GROOM AND DRAG TO PERFECTION
- PROVIDE AND INSTALL HOMEPLATE, PITCHING RUBBER, SET OF BASES AND ANCHORS

RENOVATIONS TO VARSITY BASEBALL FIELD
- LAYOUT AND EDGE ENTIRE FIELD
- RENOVATE 1-2" OF CLAY INFIELD
- RENOVATE MOUND AREA
- BUILD NEW HOMEPLATE AREA
- ADD 1" OF CLAY, LASER GRADE AND COMPACT
- TRIM AND EDGE WARNING TRACK
- ADD WARNING TRACK CLAY AS NEEDED
- HAND RAKE ALL EDGE AND HAND TAMP LIPS TO NEW SOD EDGE.
- GROOM AND DRAG TO PERFECTION
- PROVIDE AND INSTALL HOMEPLATE, PITCHING RUBBER, SET OF BASES AND ANCHORS

TRAUTMAN ASSOCIATES
ARCHITECTS / ENGINEERS
37 Franklin Street, Suite 100
Buffalo, New York 14202
P 716 883 4400
F 716 883 4268
TrautmanAssociates.com

Consultants:

Signature & Seal:

WARNING: ALTERATIONS TO THIS DOCUMENT NOT CONFORMING TO SECTION 7209.2 OR 69 5(B) STATE EDUCATION LAW, ARE PROHIBITED. **NOT PUBLISHED. ALL RIGHTS RESERVED.**

Client: LEWISTON-PORTER CENTRAL SCHOOL DISTRICT

Project: RENOVATE BALL FIELDS

SED No: DISTRICT WIDE

Project Address: 4061 CREEK ROAD, YOUNGSTOWN, NEW YORK 14174

Drawing History:

#	Date	Description

Project Status: **FOR CONSTRUCTION**

Date: -------

Project Number: 22043

Sheet Title: EXISTING SITE PLAN, NOTES AND SPECIFICATIONS

Sheet Number: C100

P:\Lewiston Porter CSD\22043 Renovate Ball Fields\Drawings\Civil\22043_C100.dwg
Friday, May 13, 2022 - 10:25 AM

P:\Lewiston Porter CSD\22043 Renovate Ball Fields\Drawings\Civil\22043_C101 details.dwg

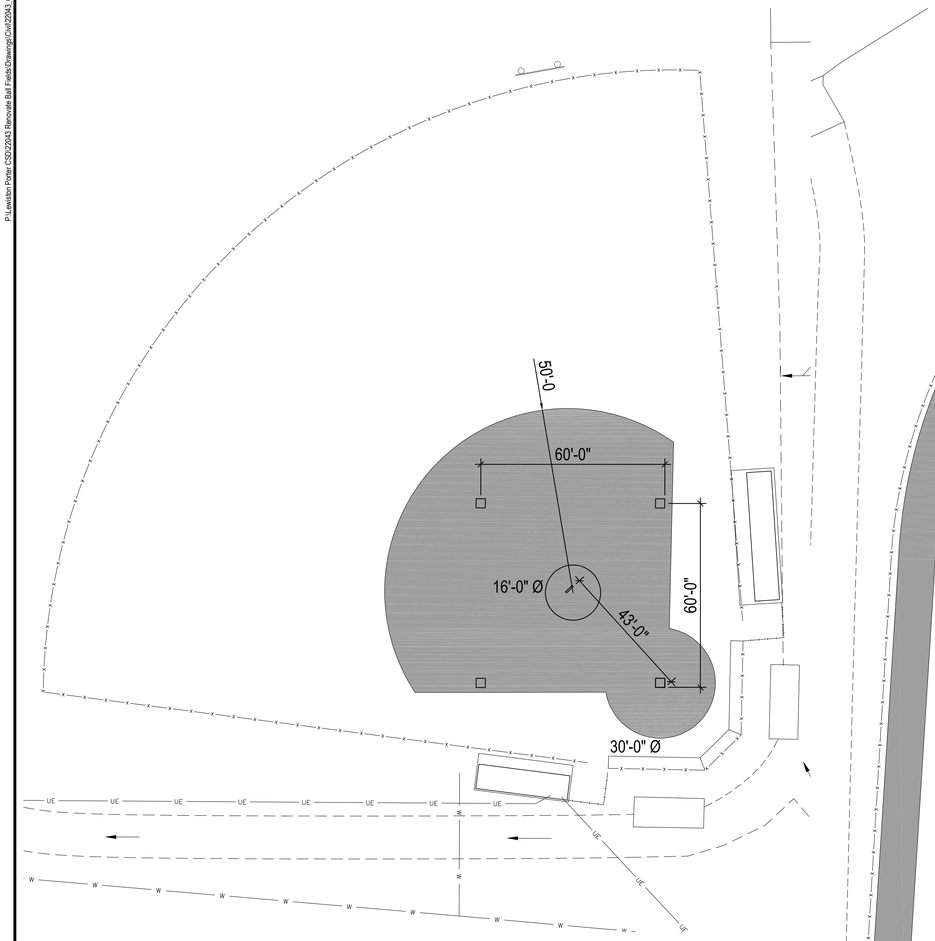

2 SOFTBALL PLAN
1" = 20.0'

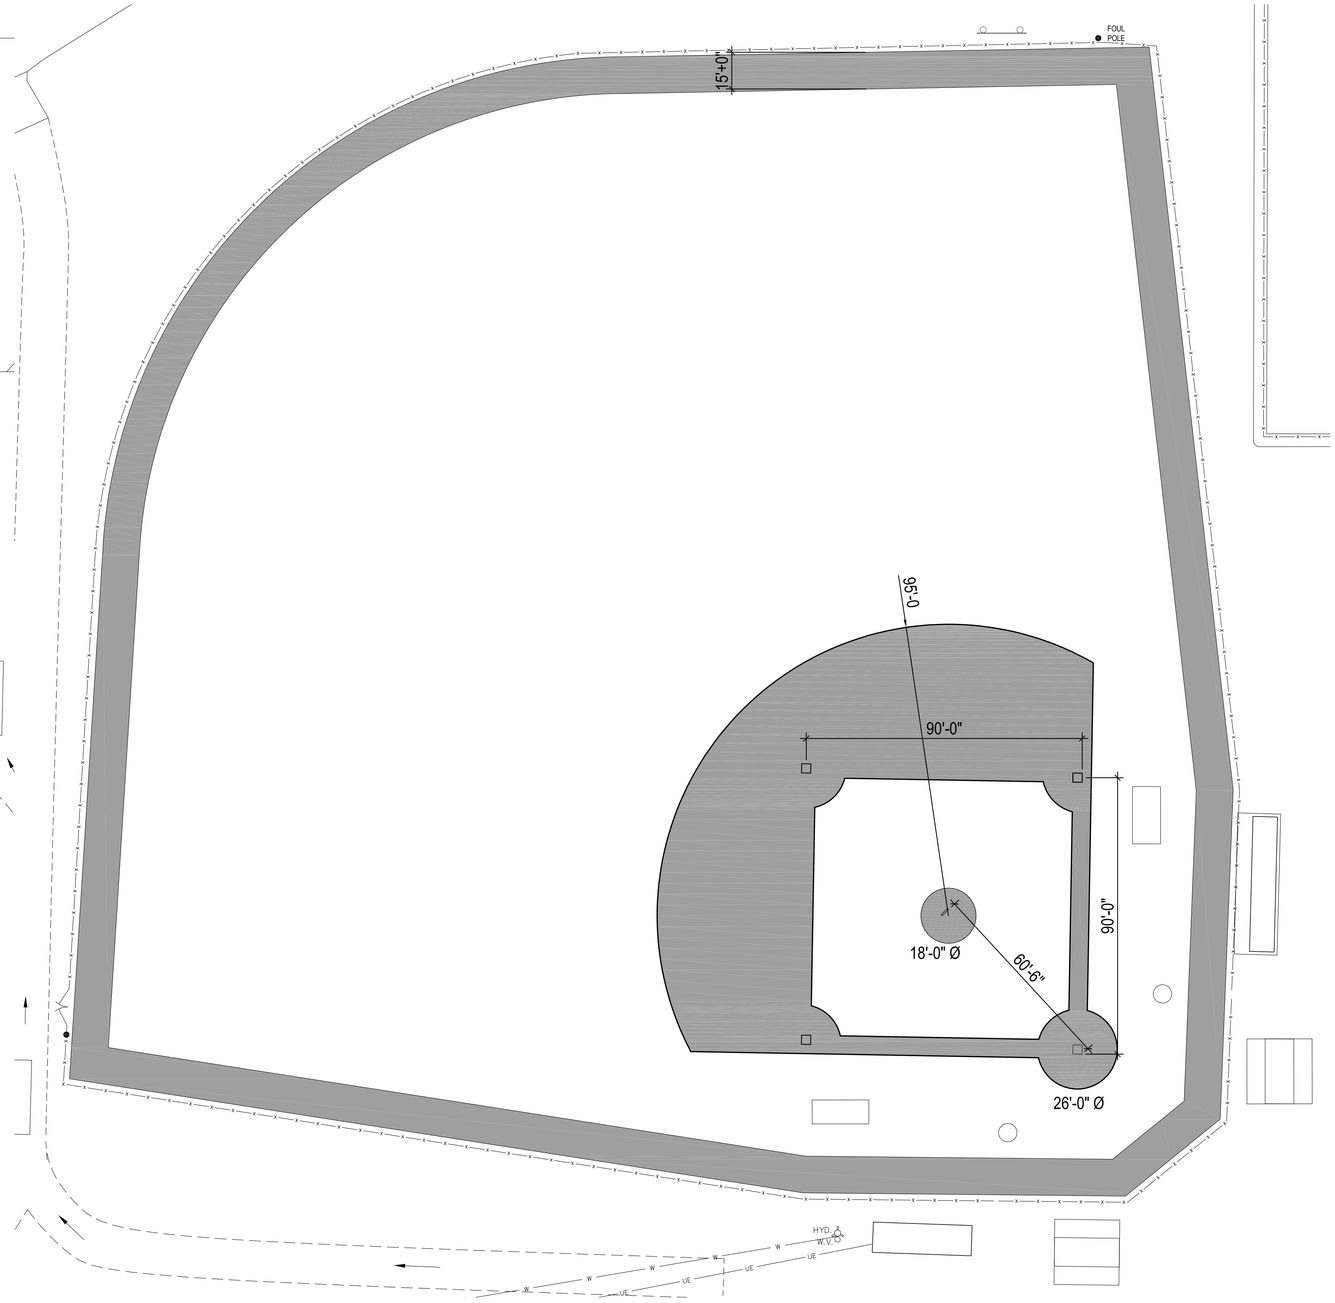

1 VARSITY BASEBALL PLAN
1" = 20.0'

TRAUTMAN ASSOCIATES
ARCHITECTS / ENGINEERS
37 Franklin Street, Suite 100
Buffalo, New York 14202
P 716 883 4400
F 716 883 4268
TrautmanAssociates.com

Consultants:

Signature & Seal:

WARNING: ALTERATIONS TO THIS DOCUMENT NOT CONFORMING TO SECTION 7209.2 OR 69.5(B) STATE EDUCATION LAW, ARE PROHIBITED.
NOT PUBLISHED. ALL RIGHTS RESERVED.

Client: LEWISTON-PORTER CENTRAL SCHOOL DISTRICT

Project: RENOVATE BALL FIELDS

SED No: DISTRICT WIDE

Project Address: 4061 CREEK ROAD, YOUNGSTOWN, NEW YORK 14174

Drawing History:

#	Date	Description

Project Status: FOR CONSTRUCTION

Date: -------

Project Number: 22043

Sheet Title: DETAILS

Sheet Number: C101

Friday, May 13, 2022 - 10:19 AM